
Stealth Watering System[™]


Direct Link

(FLT-DL)



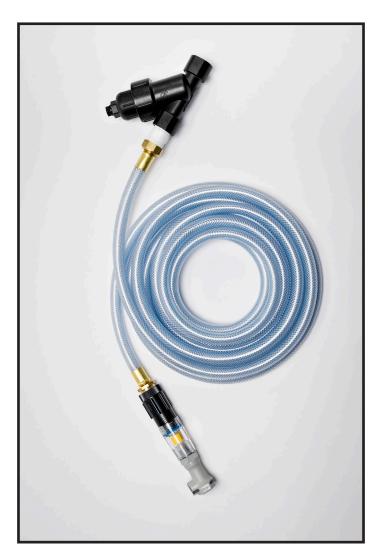

Installation: The Philadelphia Scientific[®] Stealth Watering System[™] requires a water pressure of 3-45 psi If your water supply does not meet these requirements, you will need to purchase an alternative to the Direct Link[™]






Do not fill the Direct Link directly from a faucet


The static water pressure may not exceed 80 PSI (25 bar).






A Ball Valve with a 3/4" NPT male threaded fitting .must be plumbed in to a pressurized water line (>3/4" or more in diameter).


Attach the black sediment filter to the





Attach the braided hose to the white male end of the sediment filter. Do not use more than 20 ft. of hose

Attach the Pressure Regulator to the end of the braided hose.

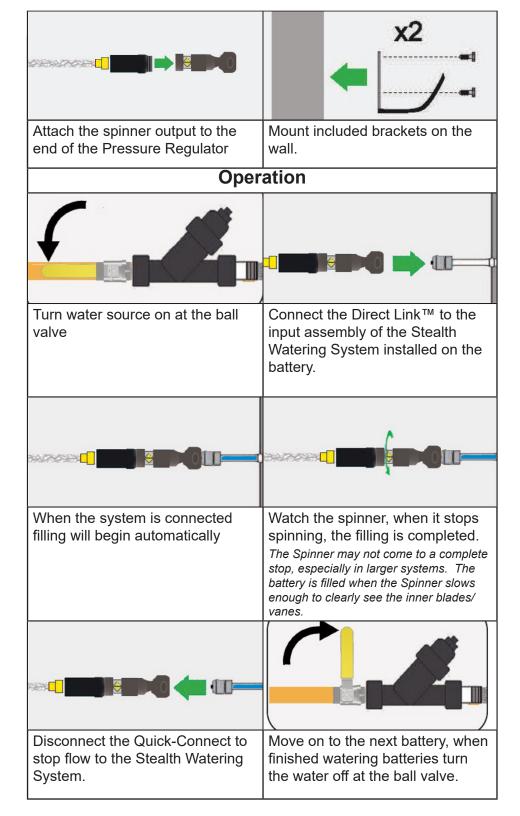

© 2023 Philadelphia Scientific LLC. All Rights Reserved. Philadelphia Scientific and the PS logo are registered trademarks of Philadelphia Scientific. Stealth Watering System and Water Injector System are trademarks of Philadelphia Scientific LLC. E&O.E.



Philadelphia Scientific LLC 207 Progress Drive Montgomeryville, PA 18936 P: 215.616.0390 F: 215.616.0500 www.phlsci.com

PAK819 01/2023